


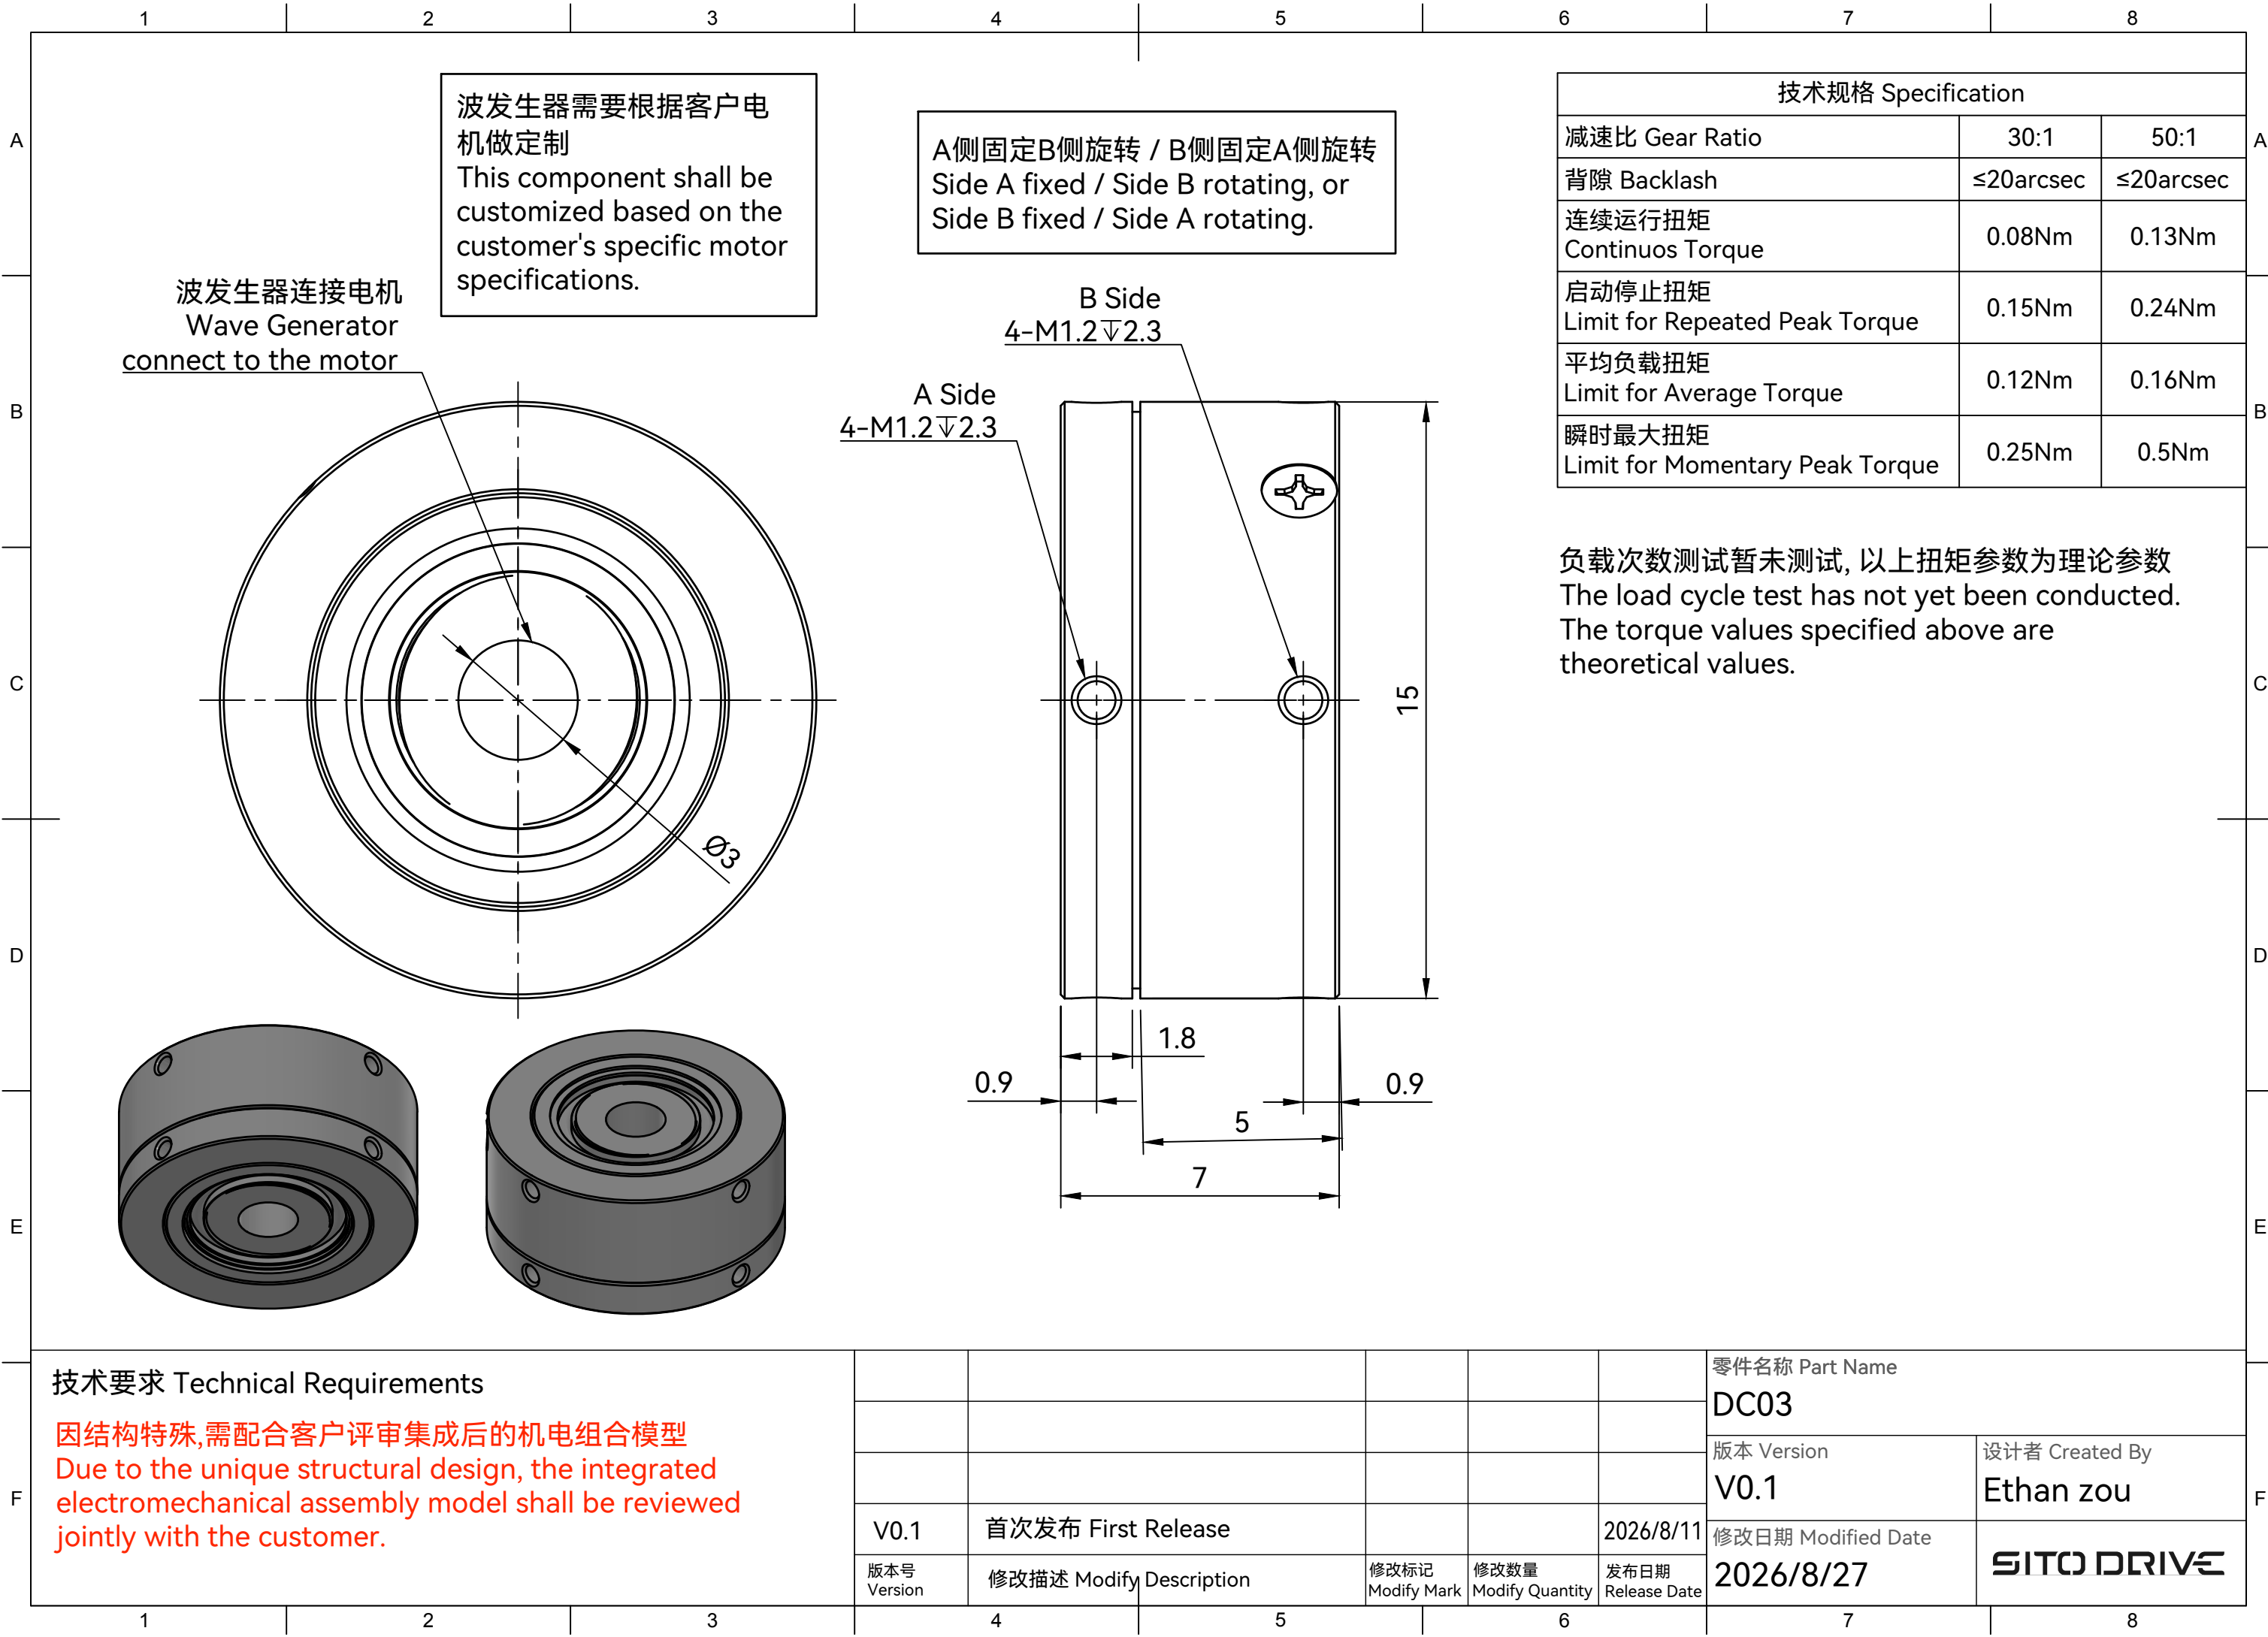

波发生器需要根据客户电机做定制
This component shall be customized based on the customer's specific motor specifications.

A侧固定B侧旋转 / B侧固定A侧旋转
Side A fixed / Side B rotating, or
Side B fixed / Side A rotating.

技术规格 Specification		
减速比 Gear Ratio	30:1	50:1
背隙 Backlash	≤20arcsec	≤20arcsec
连续运行扭矩 Continuos Torque	0.08Nm	0.13Nm
启动停止扭矩 Limit for Repeated Peak Torque	0.15Nm	0.24Nm
平均负载扭矩 Limit for Average Torque	0.12Nm	0.16Nm
瞬时最大扭矩 Limit for Momentary Peak Torque	0.25Nm	0.5Nm

负载次数测试暂未测试, 以上扭矩参数为理论参数
The load cycle test has not yet been conducted.
The torque values specified above are theoretical values.

技术要求 Technical Requirements

因结构特殊,需配合客户评审集成后的机电组合模型
Due to the unique structural design, the integrated electromechanical assembly model shall be reviewed jointly with the customer.

V0.1	首次发布 First Release			2026/8/11	
版本号 Version	修改描述 Modify Description	修改标记 Modify Mark	修改数量 Modify Quantity	发布日期 Release Date	

零件名称 Part Name	
DC03	
版本 Version	设计者 Created By
V0.1	Ethan zou
修改日期 Modified Date	
2026/8/27	SITO DRIVE